
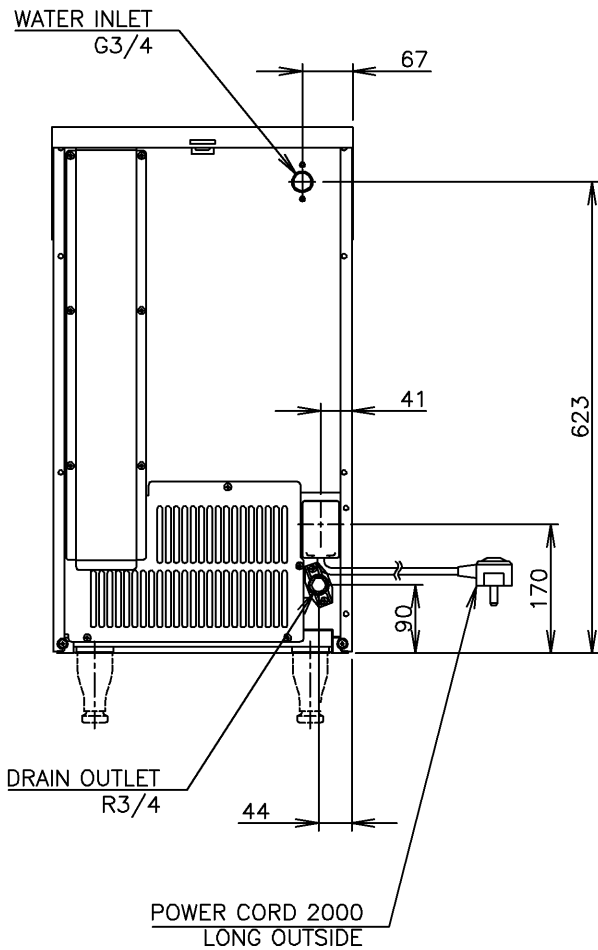
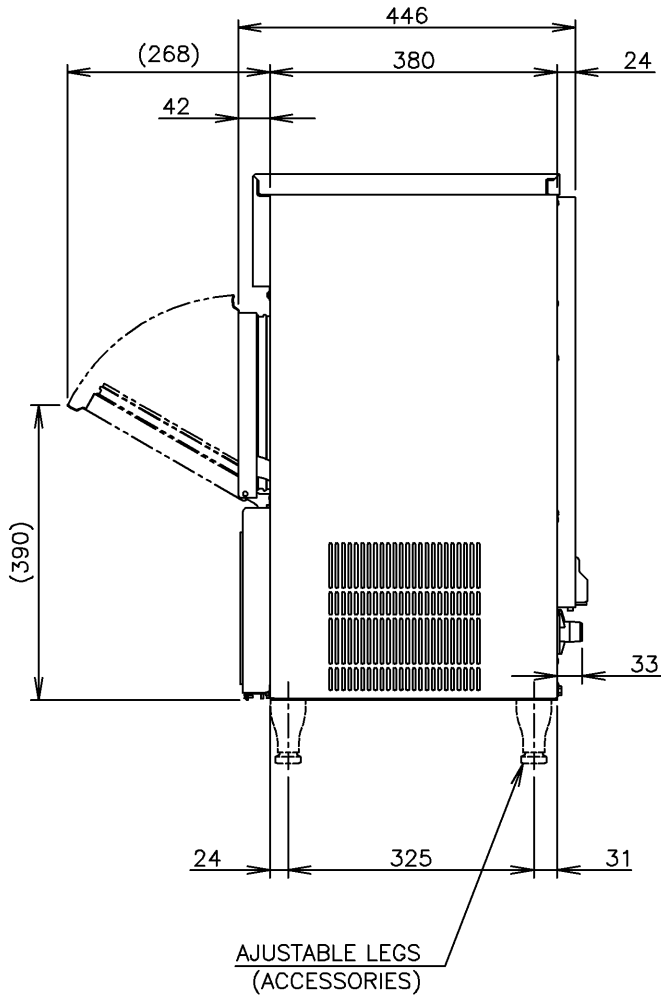
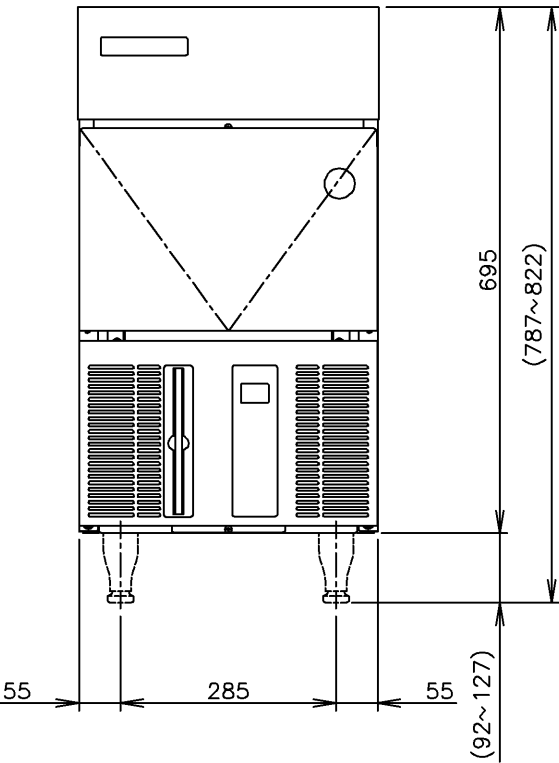


1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. Product Code: E1FA

ITEM	Hoshizaki Cube Ice Maker		
MODEL	IM-30CNE		
AC SUPPLY VOLTAGE	1 PHASE 220-240V 50Hz		
AMPERAGE	1.7A (AT.32℃, WT.21℃)		
STARTING AMPERAGE	10A		
ELECTRIC CONSUMPTION	270W (AT.32℃, WT.21℃)		
POWER FACTOR	66%		
POWER SUPPLY CAPACITY	Min. 0.66KVA (2.8A)		
ICE PRODUCTION PER 24h	Approx. 23kg(5mm)/28kg(15mm) (AT.10℃, WT.10℃)		
	Approx. 22kg(5mm)/24kg(15mm) (AT.21℃, WT.15℃)		
	Approx. 18kg(5mm)/19kg(15mm) (AT.32℃, WT.21℃)		
WATER CONSUMPTION PER 24h	Approx. 0.10m <sup>3</sup> (AT.10℃, WT.10℃)		
	Approx. 0.06m <sup>3</sup> (AT.21℃, WT.15℃)		
	Approx. 0.05m <sup>3</sup> (AT.32℃, WT.21℃)		
SHAPE OF ICE	Cube Approx. 28×28×32mm		
FREEZE CYCLE TIME	Approx. 24min (AT.21℃, WT.15℃)		
ICE PRODUCTION PER CYCLE	Approx. 0.4kg/18.pcs (AT.21℃, WT.15℃)		
MAX STORAGE CAPACITY	Approx. 11.5kg (Bin Control Setting Approx. 6kg)		
DIMENSIONS	398mm(W)×446mm(D)×695mm(H)		
EXTERIOR	Stainless Steel, Galvanized Steel (Rear)		
INSULATION	Polyurethane Foam		
INSULATION FOAM BLOWING AGENT	Water Blown		
CONNECTIONS-ELECTRIC	X-Type Con. (with CONT. Plug)		
CONNECTIONS-WATER SUPPLY	Inlet G3/4 (connected at rear side)		
CONNECTIONS-DRAIN	Outlet R3/4 (connected at rear side)		
ICE MAKING SYSTEM	Cell type		
HARVESTING SYSTEM	Hot Gas Defrost		
COMPRESSOR	Hermetic		
CONDENSER	Air-cooled, Fin and Tube type		
HEAT REJECTION	430W(370kcal/h) (AT.32℃, WT.21℃)		
EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells		
REFRIGERANT CONTROL	Capillary Tube		
REFRIGERANT CHARGE	R134a		
ICE MAKING CONTROL SYSTEM	Thermistor, Timer		Controller Board
HARVESTING CONTROL SYSTEM	Thermistor		
BIN CONTROL SYSTEM	Microswitch with Time Delay		
ICE MAKING WATER CONTROL SYSTEM	Timer, Water Pan's movement		
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse		
COMPRESSOR PROTECTION	Auto-reset Overload Protector		
ICE MAKER PROTECTION	Interlock by Controller Board		
WEIGHT	Net weight 34kg/Gross weight 38kg		
PACKAGE	Carton 505mm(W)×575mm(D)×879mm(H)		
ACCESSORIES	Scoop, Leg, Installation Kit		
OPERATING CONDITIONS	Ambient Temp.: 1 - 40° C, Water Supply Temp.: 5-35℃ Water Supply Pressure: 0.7-7.8bar(0.07-0.78MPa),Voltage Range: Rated Voltage±6%		

※ We reserve the right to make changes in specifications and design without prior notice.

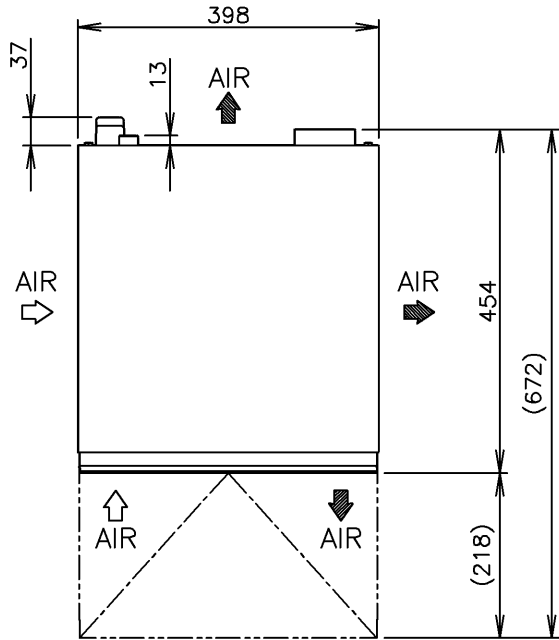

△ CHANGED AIR DIRECTIONS.