

~ Buffet Line ~
~ chafing dish solution



BIB-2-2000N
(2 Heating zones)



BIB-3-2000N
(3 Heating zones)

~ Multi-zone Unit ~
~ dishware solution



BMC-2-2500N



BMC-3-2500N

Model	Dimension (L x W x H mm)		Voltage	Power x Heating zone
	Overall	Ceran Glass		
BIB-2-2000N	800x380x66	800x380x66	230/50/1	2.0KW x 2
BIB-3-2000N	1180x380x66	1180x380x66	230/50/1	2.0KW x 3

* Generators are on rack for remote installation within 1.5 metres distance.
* 2-zone and 3-zone units are of same depth: 380mm

Buffet Line - Multi-zone				
Model	Dimension (L x W x H mm)		Voltage	Power x Heating zone
	Overall	Ceran Glass		
BMC-2-2500N	800x380x66	800x380x66	230/50/1	2.5KW x 2
BMC-3-2500N	1180x380x66	1180x380x66	230/50/1	2.5KW x 3

* Generators are on rack for remote installation within 1.5 metres distance.
* Dishware must suit for induction heating.


PRECISE Induction
Hobs and
Woks



- faster heat up time
- energy efficient
- user friendly
- easy to clean
- multiple safety features

~ Built-in ~

BI-1000NT

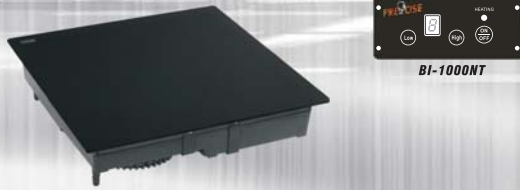

**BI-2000NT/
BI-2500NAT**



BI-2500NBT



**BI-3500/
BI-5000N**



BID-3500



**BIW-2500/
BIW-3500/
BIW-5000N**



Automatic Safety Shut-Off

If left on for more than 60 seconds without a pan, or with an incompatible pan, the unit will automatically shut off.

Material Compatibility Detector

If the saucepan is not suitable for induction cooking, the power indicator light will not illuminate.

Small Object Detector

The induction hob will not recognise utensils smaller than 50mm in diameter.

Overheating Protection Device

If the temperature of the pan overheats, and remains too high for 60 seconds, the unit will shut off automatically with a short warning sound.

自動截斷電源

啟動後若煮鍋移走超過60秒或用不適合之煮鍋，電磁爐將自動關機。

合適物料感應器

如感應到煮鍋非電磁爐適用時，指示燈不會亮起。

體積感應器

電磁爐不能感應到任何直徑少於5厘米的器皿。

過熱裝置

當煮鍋溫度過熱，及高溫持續超過60秒，電磁爐會自動關機及發出聲響提示。

Built-in unit					
Model	Dimension (L x W x H mm)		Voltage	Power x Cooking zone	CE Approval
	Overall	Ceran Glass			
BI-1000NT	360x380x77	360x380x4	230/50/1	1.0KW x 1	●
BI-2000NT	360x380x79	360x380x4	230/50/1	2.0KW x 1	●
BI-2500NAT	360x380x79	360x380x4	230/50/1	2.5KW x 1	●
BI-2500NBT S/S	385x385x78	300x300x6	230/50/1	2.5KW x 1	●
BI-3500	385x385x147	300x300x6	230/50/1	3.5KW x 1	●
BI-5000N	400x400x190	320x320x6	380/50/3	5.0KW x 1	●
BID-3500	450x700x148	350x550x6	380/50/3	3.5KW x 2	●
BIW-2500	385x385x149	311x6	230/50/1	2.5KW x 1	●
BIW-3500	385x385x193	311x6	230/50/1	3.5KW x 1	●
BIW-5000N	400x400x212	311x6	380/50/3	5.0KW x 1	●

Table top unit					
Model	Dimension (L x W x H mm)		Voltage	Power x Cooking zone	CE Approval
	Overall	Ceran Glass			
TT-2500A NEW	328x422x110	273x273x4	230/50/1	2.5KW x 1	●
TT-3500	385x520x197	300x300x6	230/50/1	3.5KW x 1	●
TT-5000N	385x520x197	300x300x6	380/50/3	5.0KW x 1	●
TTD-3500	400x735x197	350x550x6	380/50/3	3.5KW x 2	●
TTW-2500	385x485x160	311x6	230/50/1	2.5KW x 1	●
TTW-3500	385x520x243	311x6	230/50/1	3.5KW x 1	●
TTW-5000N	385x520x243	311x6	380/50/3	5.0KW x 1	●

~ Table Top ~



TT-2500A



**TT-3500/
TT-5000N**



TTD-3500



**TTW-2500/
TTW-3500/
TTW-5000N**